

## 10.1" Android 11 Fleet Management Terminal with Rockchip RK3568 Processor

### Overview


The FMT-715A is a fleet management data terminal that comes with an 10.1-inch touch screen and the Rockchip RK3568 platform. It features a pre-installed Android 11 operating system, specifically designed for applications in the fleet management industry. The FMT-715A allows for seamless integration of WiFi, LTE, Bluetooth, and GPS modules, enabling real-time data exchange, navigation, and communications. With its 10-point capacitive touchscreen, users can enjoy user-friendly and efficient operations during their daily tasks.

### Features

- 10.1" TFT-LCD with projective capacitive touch screen
- Rugged metal enclosure and fanless design
- Wide range 8-36VDC power input with ignition control
- Flexible expansion capability for Wi-Fi, Bluetooth, LTE, 5G, GPS, CAN2.0B
- Support Android 11 operating system



### I/O Interfaces

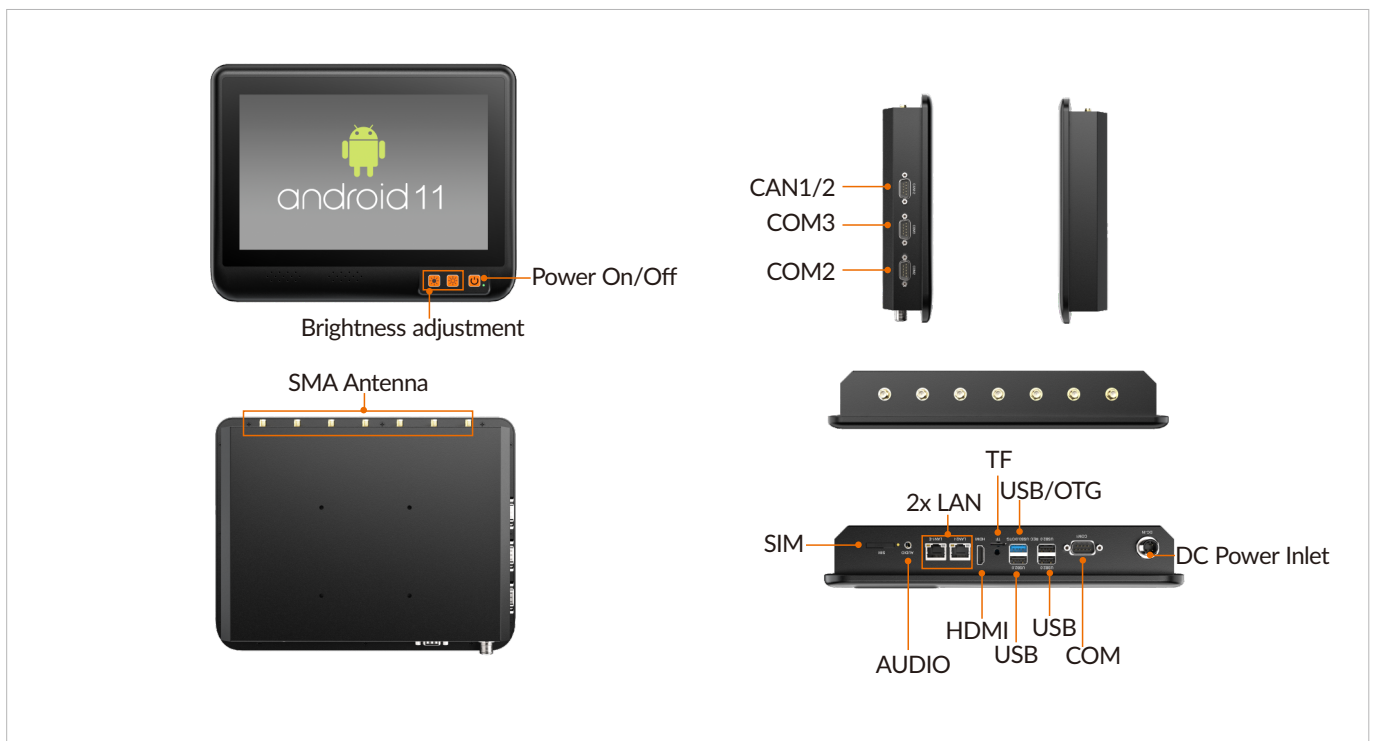


## Specifications

<b>Display</b>	
Size	10.1 inch (16:10)
Touch Type	Projected capacitive multi touch
Display Type	TFT LCD
Resolution	1280 x 800
Luminance	400 nits
Contrast Ratio	900: 1
View Angles	85 (left), 85 (right), 85 (up), 85 (down)
Color	16.2M
<b>System</b>	
CPU	Rockchip RK3568, quad core (2.0 GHz)
Memory	4GB LPDDR4-3200 on board
Storage	32GB eMMC 5.1
<b>Keypad &amp; Keyboard</b>	
Keypad	Power On/Off Brightness adjustment Power LED indicator
<b>I/O Ports</b>	
USB	3x USB 2.0 (Type A) 1x USB 3.0/OTG (Type A)
Serial	3x RS-232 (COM1/2/3, DB9)
Ethernet	2x GbE LAN
Display	1x HDMI
SIM Card Slot	1x SIM Socket
TF Card Slot	1x TF Card Slot (up to 64GB)
CAN bus	2x CAN2.0B
Antenna	7x SMA connector for external antenna (Wi-Fi, Bluetooth, WWAN, GPS)
<b>RF Communication</b>	
Wi-Fi	Wi-Fi 5: 802.11a/b/g/n/ac, 2.4G/5G
Cellular	4G, LTE 5G, NSA/SA (optional)
Bluetooth	Bluetooth 4.0/5.3
GNSS	GPS, GLONASS, Galileo, BeiDou (Ublox NEO M8N)
<b>Audio</b>	
Speaker	8Ω/2W, mono speaker
<b>Power</b>	
DC Input	8-36VDC
Power Consumption	14W (Typ.)
Ignition On/off	Optional, Power mode should be changed to AT mode, Power on delay, default 10 seconds Power off delay, default 10 seconds
Power Mode	ATX (default), AT
<b>Operating System</b>	
Android	Android 11
<b>Mechanical</b>	
Dimensions (W x D x H)	270 x 210 x 46.5 mm (10.63 x 8.27 x 1.83 inches)
Weight (N.W.)	2.2 kg (4.85 lbs)
Mounting Mode	VESA 75
Material	Aluminum+SGCC

Environment	
Operating Temperature	-20 to 60°C (-4 to 140°F)
Storage Temperature	-40 to 70°C (-40 to 158°F)
Relative Humidity	95% @ 70°C (158°F), non-condensing
Shock	MIL-STD-810G Method 516.6 Procedure I
Vibration	MIL-STD-810G Method 514.6 Procedure I
IP Rating	IP54 compliant
Certification	
EMC	CE, FCC

## Dimensions

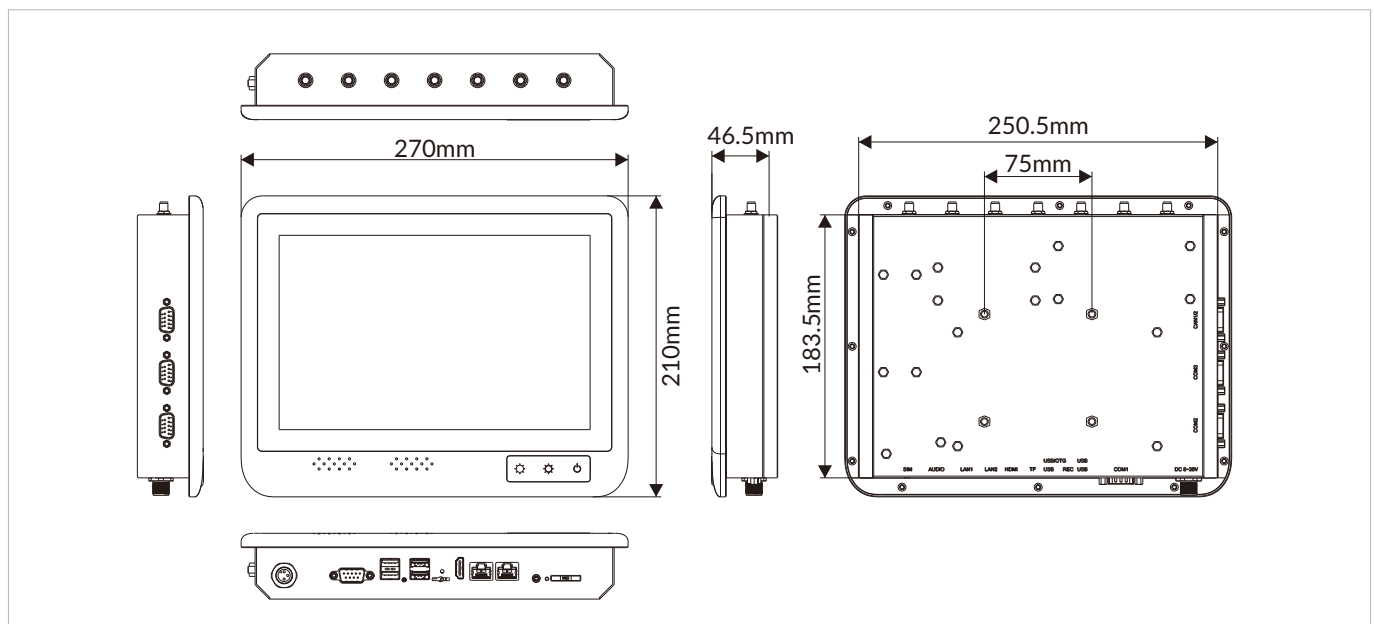

## Optional Accessories

Part No.	Description
PWR836D512-M12	8 to 36VDC Input, 5V/12VDC Output, M12 connector

## Ordering Information

Part No.	Description
FMT-715A-C525C-A001	FMT-715A with Rockchip RK3568 processor, 4GB RAM, 32GB SSD, WiFi5, BT, 4G, GPS, Android 11, SMA(1)-WiFi/Bluetooth, SMA(2)-4G_M, SMA(3)-GPS
FMT-715A-C5D5D-A001	FMT-715A with Rockchip RK3568 processor, 4GB RAM, 32GB SSD, WiFi5, BT, 5G, GPS, Android 11, SMA(1)-WiFi/Bluetooth, SMA(2)-5G1, SMA(3)-5G2, SMA(4)-5G3, SMA(5)-5G4, SMA(6)-GPS