

Overview


The DPC-9156 series is a 15.6" fanless industrial panel PC based on the Intel® Core™ U-Series / Celeron® processor. It features a modular design to allow easy CPU board or I/O board upgrades to fulfill customer needs. The DPC-9156 series offers low-power consumption, rich I/O connectivity, and Wi-Fi module expansion. It boasts a sleek design with an IP65 aluminum alloy front panel and a durable metal body, offering superior heat dissipation and high reliability for operation in harsh industrial environments. The DPC-9156 series is an excellent HMI platform for industrial applications and factory automation.

Features

- 15.6" LED-backlit LCD with capacitive or resistive touch screen
- Rugged aluminum enclosure and fanless design
- Intel® Core™ U-Series / Celeron® processor
- 2x COM, 4x USB, 2x LAN, 1x VGA, 1x HDMI
- Supports Wi-Fi, 4G
- VESA 100 mount and panel mount compatibility
- IP65 compliant front panel



I/O Interfaces

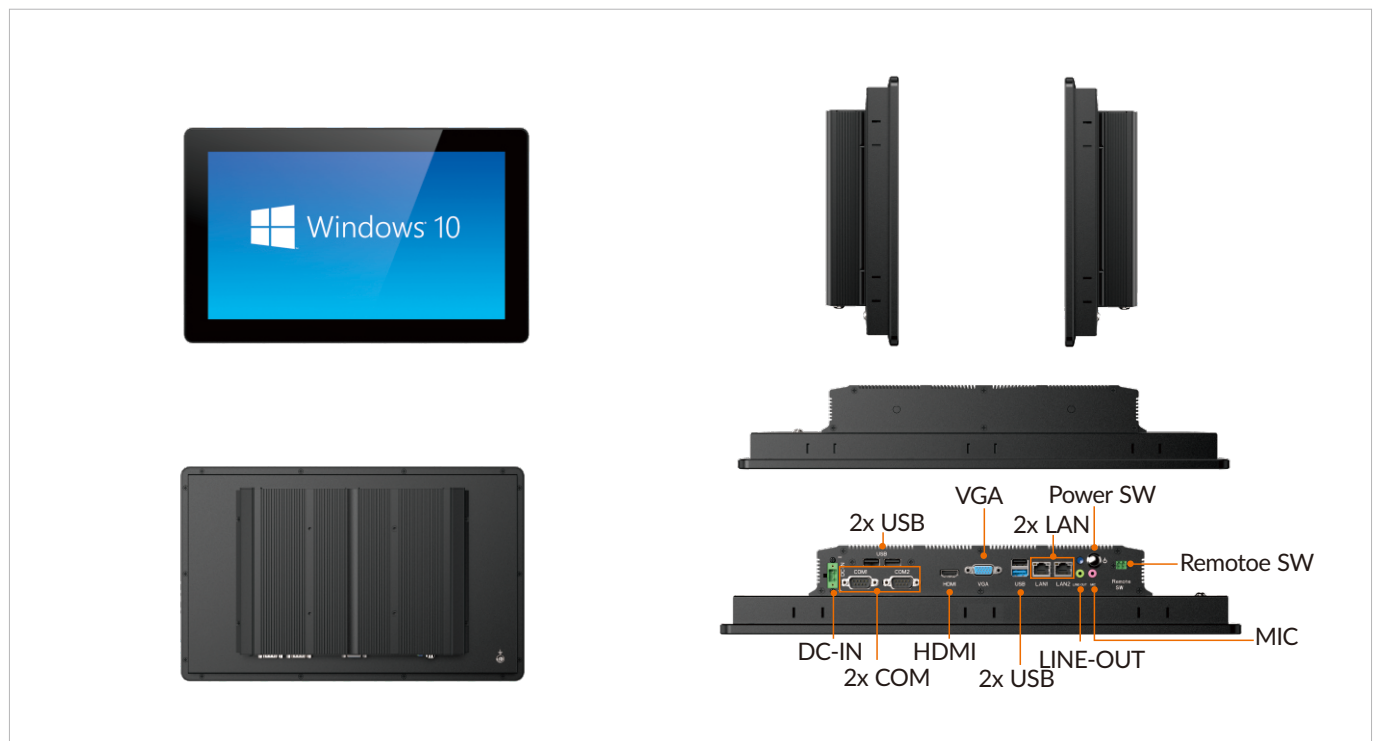

Specifications

Display	DPC-9156-J6412	DPC-9156-6200U	DPC-9156-10210U	DPC-9156-10710U
Size	15.6 inch			
Touch Type	Projected capacitive multi touch 5-wire resistive touch			
Transmittance	87% (capacitive) / 80% (resistive)			
Control Interface	USB			
Surface Hardness	≥7H/≥3H			
Resolution	1920 x 1080			
Luminance	450 nits			
Contrast Ratio	1000: 1			
View Angles	85 (left), 85 (right), 85 (up), 85 (down)			
LED Lifetime	50,000 hrs			
Color	16.7M			
System				
CPU	Intel® Celeron® J6412 (2.0 GHz) processor	Intel® Core™ i5-6200U (2.3 GHz) processor	Intel® Core™ i5-10210U (1.6 GHz) processor	Intel® Core™ i7-10710U (1.1 GHz) processor
Memory	1x SO-DIMM DDR4- 3200MHz, up to 16GB	2x SO-DIMM DDR3- 1600MHz, up to 16GB	2x SO-DIMM DDR4- 2666MHz, up to 32GB	2x SO-DIMM DDR4- 2666MHz, up to 32GB
Storage	1x 2.5" SATA HDD/SSD (optional) 1x full length Mini PCIe for mSATA SSD			
I/O Ports				
USB	2x USB 3.0, 2x USB 2.0			
Serial	2x COM (COM1 supports RS-232, COM2 supports RS-232/422/485)			
Ethernet	2x GbE LAN			
Display	1x HDMI, 1x VGA			
SIM Card Slot	1x SIM slot for 4G (optional)			
Antenna	2x SMA antenna holes			
Expansion Slot				
Mini PCIe	1x full length Mini PCIe for Wi-Fi 1x full length Mini PCIe for mSATA			
RF Communication				
Wi-Fi	Mini PCIe expansion (optional)			
Cellular	Mini PCIe expansion (optional)			
Bluetooth	Mini PCIe expansion (optional)			
Audio				
Audio	Mic in, line out			
Speaker	2Ω5W speaker (optional)			
Power				
Button	YES			
Remote Power On/Off	1x Remote switch connector			
DC Input	12VDC (9-36VDC optional)			
Power Connector	M8			
Power Consumption	25W	28W		
Power Adaptor	AC-DC, 12V@5A, 60W		AC-DC, 12V@7A, 84W	
Operating System				
Windows	Windows 10/11	Windows 7/10	Windows 10/11	
Mechanical				
Dimensions (W x D x H)	399 x 249 x 70 mm (15.7 x 9.8 x 2.7 inches)			
Weight (N.W.)	5.9 kg (13 lbs)			
Mounting	Panel mount, wall mount bracket VESA 100			
Material	Aluminum alloy panel, all-metal chassis			

Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
Vibration	5-500Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
IP Rating	IP65 compliant (for front panel)
Certification	
EMC	CE, FCC
Packing List	
Packing	1x DPC-9156 1x AC-DC power adapter 10x panel mounting buckles 1x warranty card

Dimensions

