

21.5" Fully Protected Panel PC with 6th Gen Intel® Celeron® J6412 processor

Overview

The RPC-3210 is a 21.5" industrial-grade touch panel PC powered by an Intel® Celeron® processor, ideally suited for use in industrial HMI applications. With its modular, fanless, and shockproof design, the robust RPC-3210 is fully IP65 rated for dustproof and waterproof protection, ensuring extreme durability. The RPC series offers display screen options available in both 4:3 and 16:9 aspect ratios. Moreover, it comes equipped with M12 I/O connectors, empowering it to withstand even the harshest environments.

Features

- Intel® Celeron® J6412 processor
- 21.5" panel PC with capacitive or resistive touch screen
- Sealed to full IP65 protection against water and dust
- M12 connectors for maximum protection against vibration, shock and dirt
- -10 to 50°C operating temperature



Operating Temp.



Power Input



M12





RF Communication



IP65

I/O Interfaces

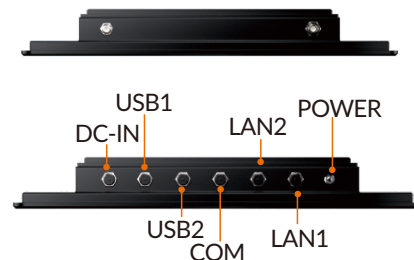

Specifications

Display	
Size	21.5 inch
Touch Type	5-wire resistive touch Projected capacitive multi touch (optional)
Resolution	1920 x 1080
Luminance	250 nits
Contrast Ratio	1000:1
View Angles	89 (left), 89 (right), 89 (up), 89 (down)
Color	16.7 M
System	
CPU	Intel® Celeron® J6412 processor
Memory	DDR4 up to 16GB
Storage	mSATA up to 1TB
Graphics	Intel® HD graphics
BIOS	AMI
I/O Ports	
USB	4x USB2.0
Serial	1x COM (supports 1x RS232 or 1x RS485)
Ethernet	2x GbE LAN
Expansion Slot	
Mini PCIe	1x Full length Mini PCIe for mSATA, 1x Full length Mini PCIe for Wi-Fi or 4G
Antenna	2x SMA antenna holes
RF Communication	
Wi-Fi	Wi-Fi 802.11 a/b/g/n/ac (optional)
Cellular	4G/LTE (optional)
Bluetooth	BT4.0 (optional)
Power	
Button	Yes
DC Input	12 VDC
Power Consumption	29 W (Typ.)
Power Mode	ATX
Operating System	
Windows	Windows 7, Windows 10
Mechanical	
Dimensions (W x D x H)	544 x 341.8 x 67 .8mm (21.4 x 13.5 x 2.7 inches)
Weight (N.W.)	9.1 kg (20 lbs)
Mounting	VESA 100
Material	Aluminum and SGCC
Environment	
Operating Temperature	-10 to 50°C (14 to 122°F)
Storage Temperature	-40 to 80°C (-40 to 176°F)
Relative Humidity	10% to 95% @ 40°C (104°F), non-condensing
IP Rating	IP65 compliant
Certification	
EMC	CE FCC
Packing List	
Packing List	1x RPC-3210 1x warranty card

Dimensions

